




15-DEC-2004 DGN File: N:\Ead\Standard Drawings\Imperial\2005\Approved\Fence and Gates (FG) 2B.dgn

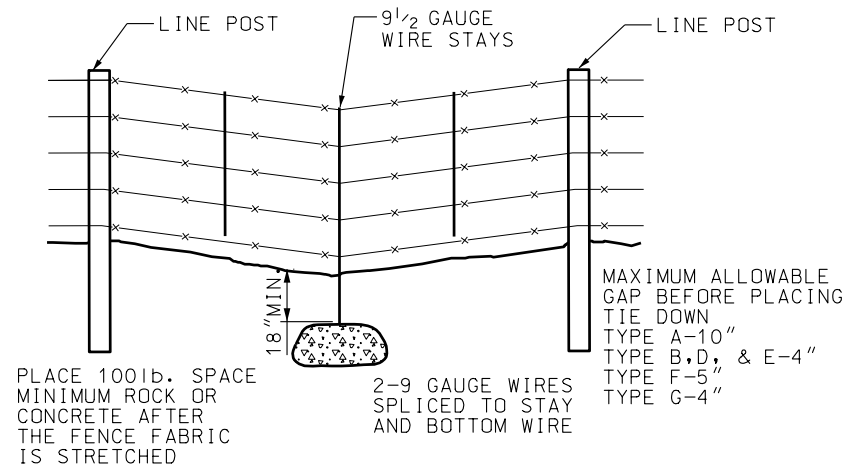


TYPICAL SAG SECTION

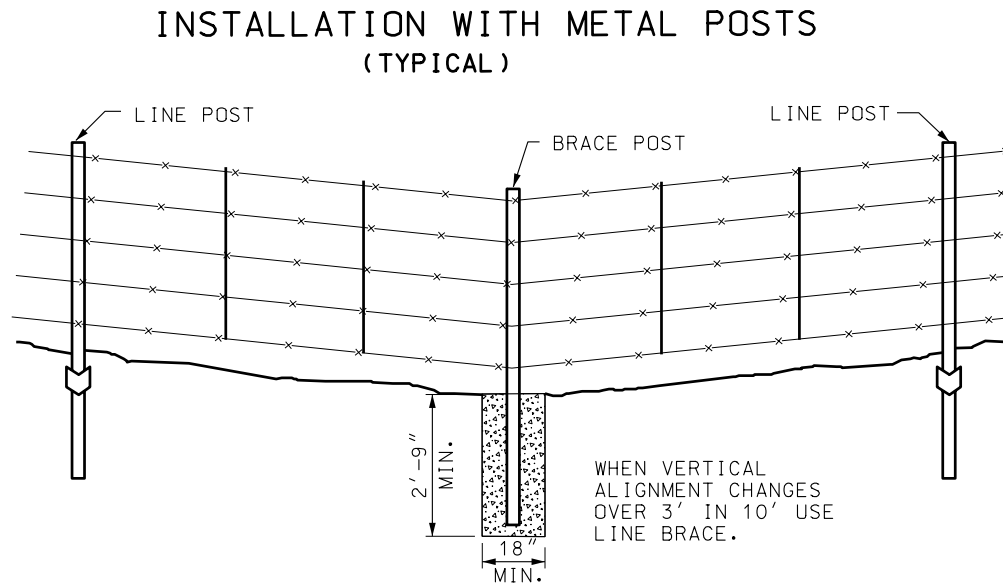

TYPICAL VERTICAL ALIGNMENT CHANGE

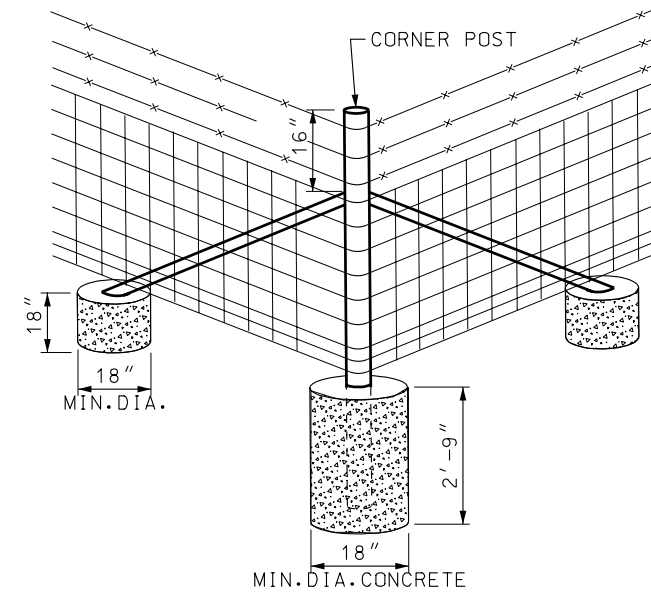


CORNER BRACE  
SEE NOTE #6 STD DWG FG 2A

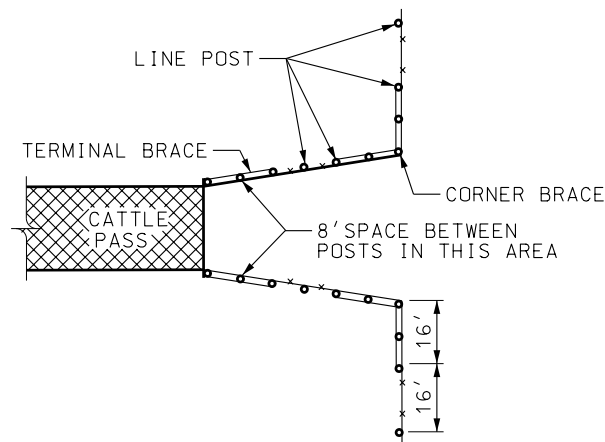


CATTLE PASS FENCE  
DETAIL


DEER COUNTRY  
NOTE: LAP THE 47" & 26" MESH WIRE 2".  
TIE OR CLAMP 47" & 26" MESH WIRE  
TOGETHER, THE SPACING NOT TO  
EXCEED 2'-0" SPACING OF CONNECTINGS.

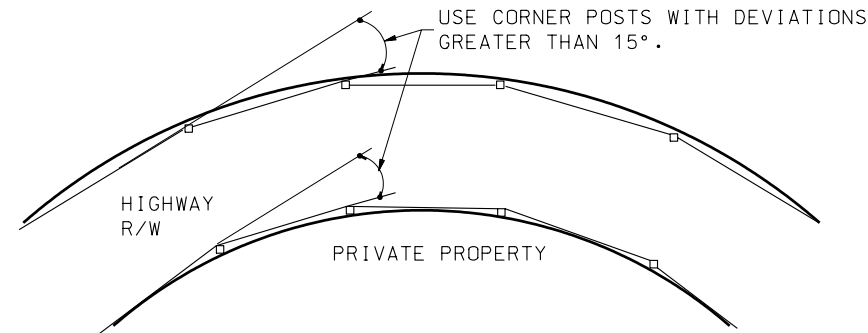

DEER BARRIER ON CURVES  
SEE NOTE #6 STD DWG FG 2A

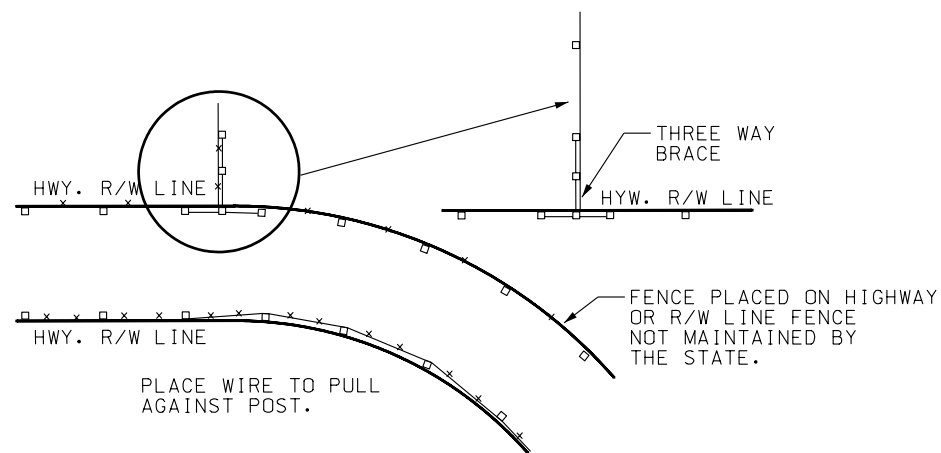

POST & WIRE LOCATION

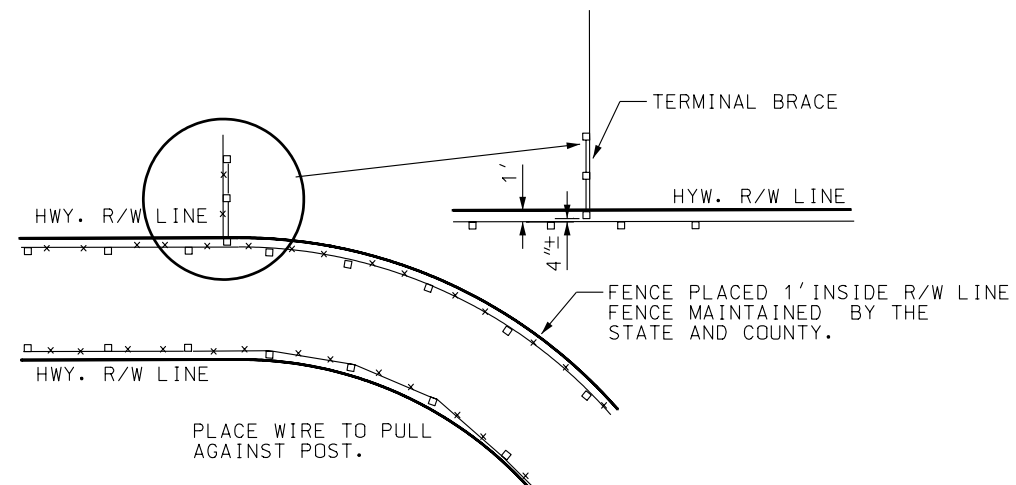

POST & WIRE LOCATION

UTAH DEPARTMENT OF TRANSPORTATION  
STANDARD DRAWINGS FOR ROAD AND BRIDGE CONSTRUCTION

RIGHT OF WAY  
FENCE AND GATES  
(METAL POST)

STD DWG  
FG 2B

RECOMMENDED FOR APPROVAL  
CHAIRMAN STANDARDS COMMITTEE  
APPROVED  
JAN. 01, 2005  
DATE  
JAN. 01, 2005  
DATE  
DEPUTY DIRECTOR

REVISIONS

NO. DATE APPR. REMARKS